


## Strike and Accessories

### Strikes


#### Strikes for use with 2260 vertical rod exit device

All strikes are black nylon coated

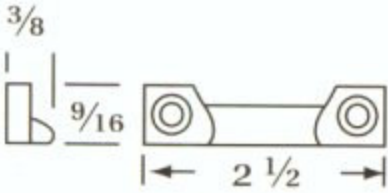


**221**

Standard for 2260. Applied to surface of floor or to a flat threshold. Standard packaging.

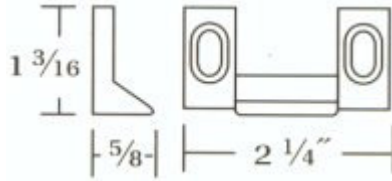

**227**


Applied to surface of stop. No mortise required. Standard packaging.

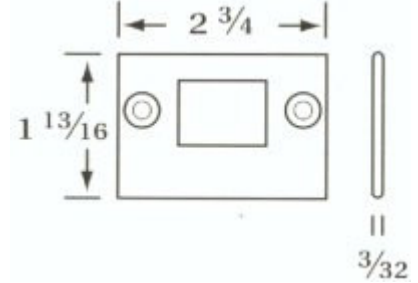

**233**


Bottom strike. Alternate bottom strike. Flush mounting stainless steel. Furnished with expansion shields. Requires mortise in the floor.

#### Strikes for use with F2260 vertical rod fire rated exit device

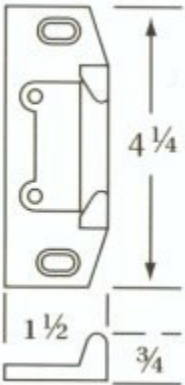

**245**

Surface applied for F2260. Standard packaging.

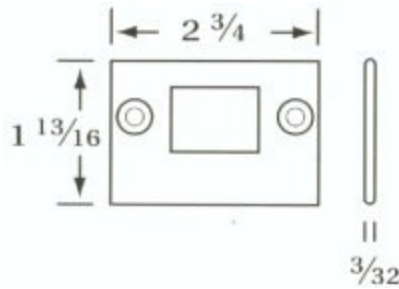


**233**


Bottom strike for F2260. Flush mounting stainless steel. Furnished with expansion shields. Required mortise in the floor. Standard packaging.

#### Strike for use with 2200 rim type exit device

#### Strike for use with F2200 rim fire exit device

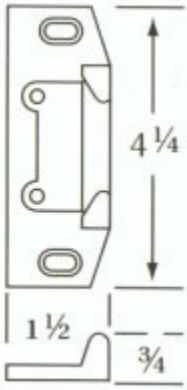


**239**  
For 2200 surface applied  
Standard Packaging.

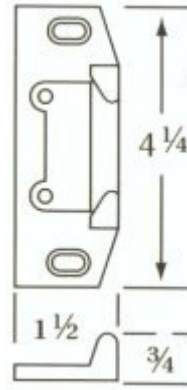


**245**  
For F2200 surface applied,  
Standard packaging.

**Overlapping Strike**




**251**  
Surface applied. Used on inactive leaf for device  
on active leaf of pair of doors without mullion.

**Additional strikes**



**LFF**  
Lock front filler.



**SF**  
Strike filler.


**Accessories**

**Mullions**


Lockable and electric lockable mullions are available on request.



**418**  
Removable mullion Aluminum painted  
( Prime coat) includes top and bottom  
retainer supplied as a stock 96" for non  
fire rated applications.



**424**  
Fire exit mullion. 2" x 3" steel tubing round  
corner, iron construction with iron top and  
bottom retainers. To be used with two rim type  
devices on two independent active doors with  
full double door openings.

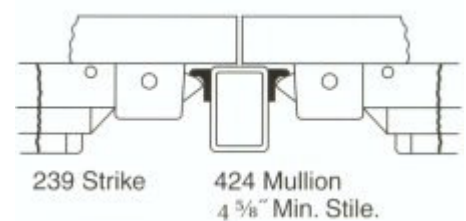

---

**Additional Rods** - Vertical rod for 10 feet high doors available on non fire rated vertical rod devices only. Use part # **VRRD-10**.

---

#### **Glass Bead Shim Kits**

**401** - For rim type, 1/8" thick

**406** - For vertical type, 1/8" thick

**412** - For fire rated vertical type, 1/8" thick

When exit devices are used with shim kits with outside trim, spindle length thumbpiece and thru bolt length must be increased accordingly.

---

#### **Cylinder Dogging Kits**



Prefix "CD" before part#. Available for all 2200 Series devices except for exit hardware. Cylinder dogging with a mortise cylinder is located on the mounting insert locks bolt in retracted position. 27" minimum door width is required.

To order kit only use part# **36CYLD2200** for 36" and **48CYLD92200** for 48" devices. Specify finish.