



Lockset - Barrington BA Series

[Functions](#) [Part Numbers and Descriptions](#)


[Print Catalog Page](#)



ANSI Grade 2

UL Listed, UL10C, UBC 7-2-1997

Construction Features:

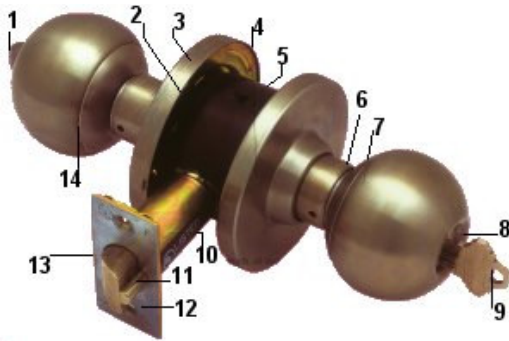

1. Button push in and turn button function.
2. Internal mechanism heavy gauge cold rolled steel, all parts are zinc plated and dechromated to assure protection from rust or corrosion. Special lubricant applied for smoother operation.
3. Snap-on inside rose conceals mounting plate and screws.
4. Outside rose threaded 3" diameter large rose adjustable for various door thickness.
5. Cylindrical housing 2 1/8" diameter provides great strength and durability.
6. Long spindle hub eliminates knob wobble.
7. Cylinder knob demountable for quick rekeying and replacement: reversible for either right or left-hand doors swinging in or out.
8. Cylinder precision solid brass, pick resistant 6-pin tumbler. Must turn key one-quarter to remove and replace cylinder. Can be construction keyed and masterkeyed as required.
9. Solid Brass 6 Pin "C" keyway. Available with Interchangeable Core.
10. Latchcase sturdy, all steel mechanism.
11. Guard bold dead locks latch bolt automatically.
12. Front standard 2 1/4" X 1" (2 3/8"), 2 1/4" x 1 1/8" (2 3/4"), 1/4" radius round corner, circular drive-in available. Bevel 1/8" in 2" to special order.
13. Throw bolt affords a high degree of security. Standard with solid, rustless, pressure cast. #300 series antimagnetic stainless steel or brass latch bolt available with UL listed latchbolt for 3 hour rated door 4" x 8" or non UL latchbolt.
14. Knobs cannot slip or pull off. Both kept in position by positive spring catch.

Specifications:

- **Exposed Trim** - Wrought brass, bronze or stainless steel.
- **Door Ranges** - Adjustable for 1-3/8" to 1-3/4" door thickness.
- **Backset** - Standard 2-3/4", 2-3/8", 3 3/4" or 5" extension available.
- **Strike** - ANSI strike (standard) 4 7/8" x 1 1/4". Optional "T" or full lip strike available.
- **Finishes** - US32D, US10B, US3, US10. Other finishes not shown available subject to quantity and lead time.
- **Keying** - 6-pin "C" keyway cylinder, 2 keys per lock.
- **Additional Keyways** - Schlage E, Russwin D1, Corbin 60, Sargent LA, Falcon/Weiser E, Arrow, Yale 8, Yale GA. Can also accept Medeco, Assa, and Kaba High Security Cylinders.
- **Bore Diameter** - 1" for latch. 2 1/8" for lock housing.
- **Packaging Includes:**
 - UL Listed 2 3/4" backset, 2 1/4" x 1 1/8" faceplate

Other Styles:


Plymouth and Tulip styles (equivalent to Schlage "A" series) are available. Subject to leadtime.



BA



PLY



- Standard "C", 6 pin cylinder
- ASA Strike
- Meets or exceeds requirements of BHMA/ANSI A156.2 series 4000 for grade 2 (FF-H-106C)

TUL

Cross Reference Information

"Barrington" BA Standard Duty Cylindrical Locks - ANSI Grade 2

FUNCTION	CAL-ROYAL BA	SCHLAGE A	CORBIN 5600	RUSSWIN 3300	SARGENT 6 LINE	YALE 5300	ARROW 151	PDQ SV	ANSI NO.	FED. NO.
Entrance	BA-00	A53PD	5651	3340	6G05	5307	151	SV116	F81-2	160A
Privacy	BA-20	A40S	5620		6U65		157	SV176	F76-2	160L
Passage	BA-30	A10S	5610	3310	36U15	5301	156	SV126	F75-2	160N
Storeroom	BA-05	A80PD	5657	3352	6G04	5305	151F	SV115	F86-2	160D
Classroom	BA-03	A70PD	5655	3340 ^{5/8} FCI	6G37	5308	151S	SV148	F84-2	160R
Double Cyl.	BA-04	A66D		3340 ^{5/8}		5316		SV137		
Sgl. Dummy	BA-40	A170	1/2DT		6U93	355	125	SV211	F79-2	
Hotel	BA-HI	A85PD	5629	3342	6G50	5322	151H	SV161	F93-2	160H
Closet	BA-60	A25D	5611	3316	6G15-3	5328	156CB	SV125		