



ROFU® ELECTRIC STRIKE MODEL 1509

1509 - SERIES, FACEPLATE SIZE $1\frac{7}{16}" \times 7\frac{15}{16}"$

MODEL 1509 — Fail - Secure (Non Fail - Safe)

Electric strikes for use with cylindrical locksets.

For Commercial and Residential, New and Retrofit Uses



1509
Non-Handed


Standard Features

- Zinc/Aluminum Alloy Faceplate
- Frame Type - Hollow Metal, Aluminum or Wood
- Corrosion - Resistant case and moving parts.
- Tamper Strength Test - 1000 lbs (454kg)
- Cycle Test 500,000 cycles
- Keeper Depth - **5/8"** Maximum Latch Projection possible with 1/8" Door/Frame Clearance - **3/4"**
- Strike Depth 1.43" Overall
- Reversible - Non Handed
- Limited Warranty - **36 Months**


Available in the following Voltages and Finishes:

| | |
|----------------------|--------------------|
| Specify Finish | xUS28 |
| Voltage, Fail Secure | x01=8-16VAC/3-6VDC |
| | x05=12VAC/12VDC |
| | x08=24VAC/24VDC |

WOOD JAMB PREPARATION

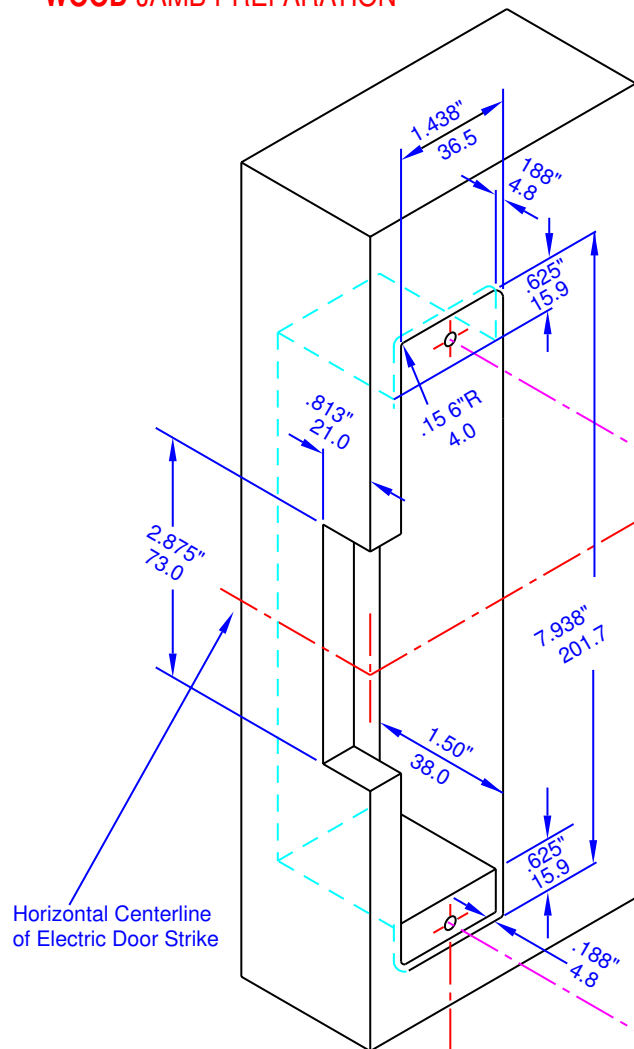

INSTALLATION

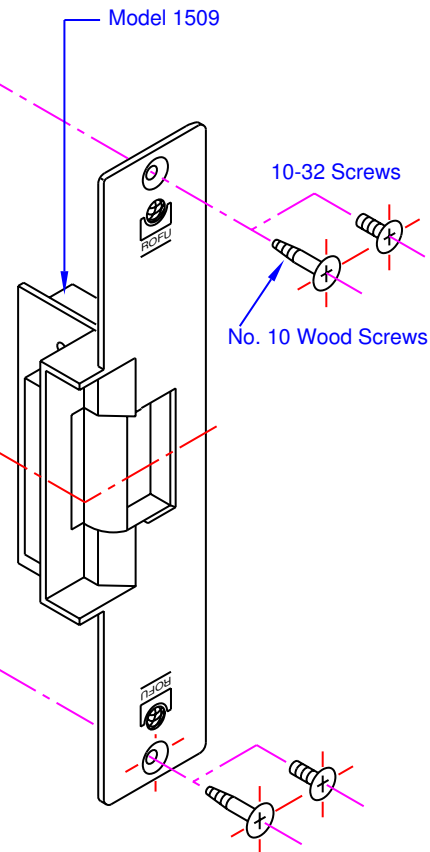

The mounting screws of the electric strike and the mounting screws of the deadlatch are located on the vertical centerline.